

January 20, 2017

Rehabilitation of the Birchmount Road Culvert over Taylor Massey Creek

Contract # # 16ECS-TI-03BE

Expected Start Date: February, 2017


Expected End Date: May, 2017

**Content/dates subject to change. More details will be provided in a future notice*

The City of Toronto will complete interim rehabilitation repairs of the Birchmount Road Culvert over the Taylor Massey Creek in 2017.

This work will ensure that the culvert meets today's standards and remains safe for vehicles and pedestrians crossing above. It will also address and repair a sinkhole on Birchmount Road that was developed in March 2015 near the culvert. The project is part of the Council-approved 2016 Capital Works Program.

MAP OF WORK AREA

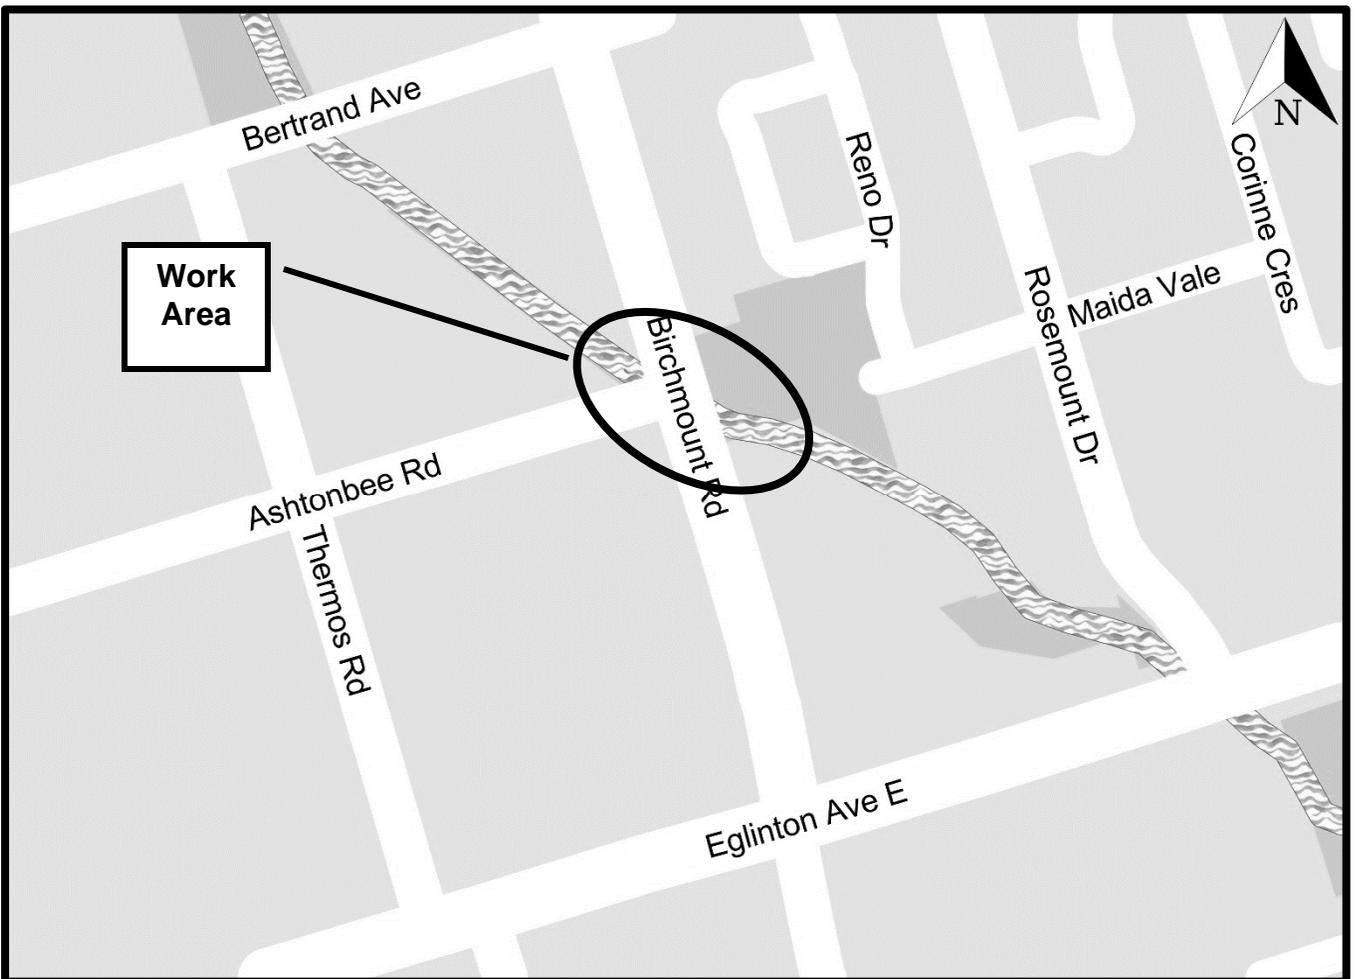

WORK DETAILS

This project will involve:

- Relining portions of the existing culvert to repair damaged areas; and
- Stabilizing the soil to strengthen areas of the culvert to prevent future sinkholes from developing.

Construction will take place in two stages.

Stage #	Schedule	Work Details
1	February - March	Work will take place inside the culvert. The existing culvert will be relined to repair and strengthen damaged areas.
2	April – May	Work will take place at the intersection of Birchmount Road and Ashtonbee Road. The fill material over and near the culvert will be injected with grout to strengthen the existing soil. Once all repairs have been completed the asphalt will be resurfaced to restore the road to like-new conditions.

	<p>Work Hours: Work will take place from 7:00 a.m. to 7:00 p.m., Monday to Friday, with work after hours weekend work as required.</p>
	<p>Traffic Management: Efforts have been made to manage traffic in the area for the safety of workers, road users and residents. Road users should expect delays and increased traffic on nearby main and side streets.</p> <p>From April – May:</p> <ul style="list-style-type: none"> • Birchmount Road will be reduced to one lane in each direction from 9:00 a.m. to 3:30 p.m., Monday to Friday. • Two lanes in each direction will be restored for the morning and evening rush hours and when workers are not on site.
	<p>TTC Route Information: TTC will temporarily relocate 2 bus stops on Birchmount Road bus stop (ID#s) 374 and 14263 as required to maintain full access for TTC customers at all times.</p>
	<p>Pedestrian Access: The sidewalk on the west side of Birchmount Road will be maintained at all times except temporary partial closure may be required at the junction of Birchmount Road and Ashtonbee Road to facilitate soil stabilization repairs in Stage 2. Temporary closure of the sidewalk on the east side of Birchmount Road may be required to facilitate the soil stabilization repairs in stage 2. At least one sidewalk on Birchmount Road will be maintained open at all times.</p>

WHAT TO EXPECT BEFORE CONSTRUCTION

- Work crews will mark sidewalks and curbs to locate underground utilities, such as gas, water and cable;
- A Construction Notice will be delivered to affected properties before work begins with an exact start date and more details about the work.

	<p>Accommodation: Residents that require accommodation must contact the project manager to arrange access during construction.</p>
---	---

MORE INFORMATION:

If you have questions about the upcoming work, please contact us.

Project Manager	Hangang Li, P. Eng., 416-392-8249, Hangang.Li@toronto.ca
TTY Hearing Impaired Service	416-338-0889 (Daily 8:00 am – 5:00 pm, closed holidays)
General inquiries	311
Website	toronto.ca/improvements/ward37.htm

Thank you for your patience. Building a great city takes time. Better infrastructure for all of us is worth the wait.