

December 7, 2016

Road Rehabilitation on Carsbrooke Road and other local roads Road Reconstruction on Forestone Road

Contract: 16ECS-TI-103LR

Start Date: August 29, 2016

Original End Date: December 12, 2016

NEW End Date: Spring 2017

**Timeline is subject to change. Future notice to be provided.*

In late October, The City of Toronto started to replace the curbs on Carsbrooke Road, Cambrian Road, Welkin Gate, Ulverston Road and Beckenham Court. They also started to replace sidewalks where required on these roads as well as on Wareside Road south of Ulverston Road. This work is scheduled to be completed by December 16.

The City of Toronto was to rehabilitate roads using the CIREAM (Cold In-Place Recycled Expanded Asphalt Mix) process as well as curb replacement and sidewalk repairs on Groverdale Road, Wareside Road and Guernsey Drive. The CIREAM process is an ecological method of road rehabilitation in which the existing asphalt is recycled and placed back down as the asphalt base layer. Work will take place on these streets (see map):

- Beckenham Court
- Ulverston Road,
- Wareside Road,
- Cambrian Road,
- Guernsey Drive,
- Welkin Gate,
- Groverdale Road, and;
- Carsbrooke Road.


Forestone Road has been fully reconstructed because of grading constraints that would have arisen if the CIREAM process was used there. Full road reconstruction differs from the CIREAM process in that all the existing materials of the road are removed and replaced (i.e. granular base materials and asphalt). There are also be new curb and gutter on both sides and concrete sidewalk on the east side along Forestone Road. This work is scheduled to be completed by December 16.

Progress on the project was slowed down because there was a two-month delay in completing the utility locates. Utility Locates are mandatory before any work starts as they identify buried utilities (gas, water, cable, phone) to ensure they remain intact when work starts.

At this time, the road work will resume in Spring 2017, this is because CIREAM process paving work requires consistently warmer and drier weather (+15 degrees), which does not occur this time of year. The curb replacement and any required sidewalk replacement on Groverdale Road, Wareside Road and Guernsey Drive will also resume in the Spring 2017.

We recognize that a project of this nature is disruptive to the community and apologize for the inconveniences caused by the delayed end date. A new notice will be issued before work starts in the Spring.

MAP OF WORK AREA

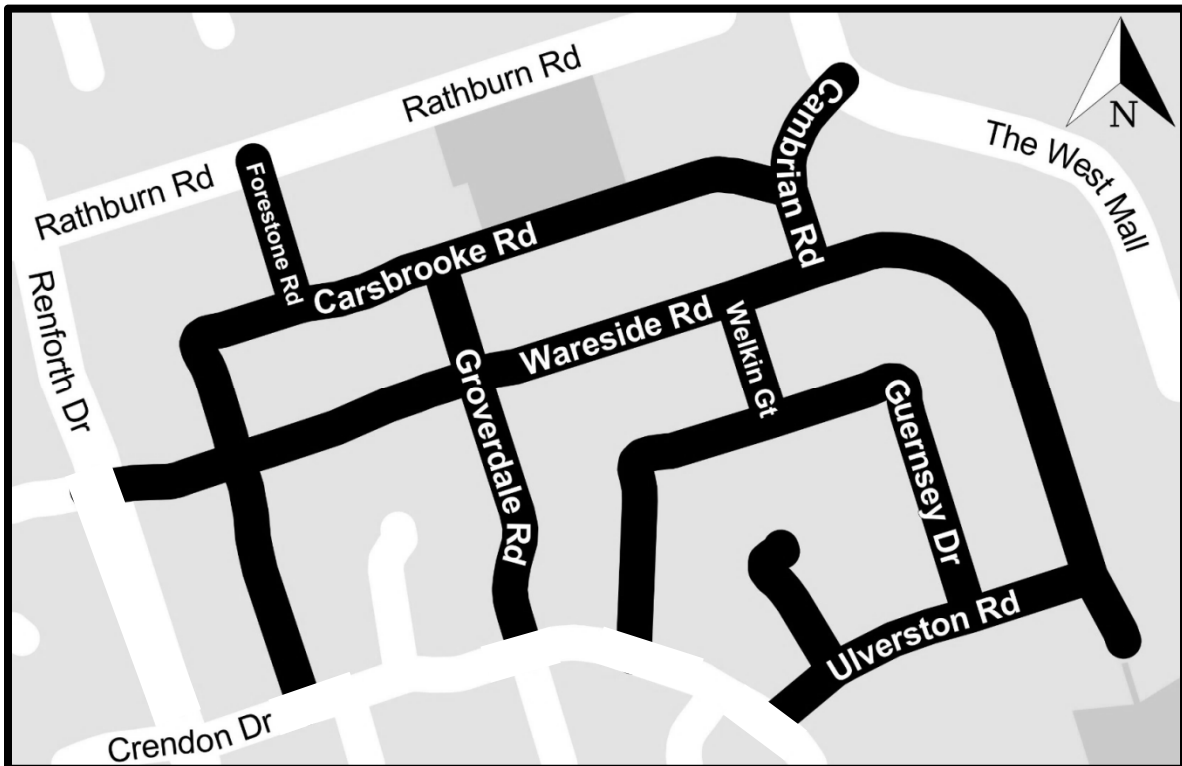




WORK DETAILS

The following work will be completed by December 16:

- Remove and replace all curb & gutter on Carsbrooke Road, Cambrian Road, Welkin Gate, Ulverston Road and Beckenham Court.
- Remove and replace localized sidewalk where required on Carsbrooke Road, Cambrian Road, Welkin Gate, Ulverston Road, Beckenham Court and on Wareside Road south of Ulverston Road.
- Full road reconstruction of Forestone Road including new granular base, new asphalt base & surface layer, new concrete curbs and concrete sidewalk on the east side of the road.

The following work will be completed in the spring 2017:

- Remove and replace all curb & gutter on Groverdale Road, Wareside Road and Guernsey Drive
- Remove and replace localized sidewalk where required on Groverdale Road, Wareside Road and Guernsey Drive
- Rehabilitate roads using the CIREAM (Cold In-Place Recycled Expanded Asphalt Mix) process for the base and a new asphalt surface layer on Beckenham Court, Ulverston Road, Wareside Road, Cambrian Road, Guernsey Drive, Welkin Gate, Groverdale Road, and; Carsbrooke Road.
- **All restoration work is scheduled for 2017**

	<p>Work Hours: Work will take place from 7:00 a.m. to 7:00 p.m., Monday to Friday, with work after hours and on weekends as required.</p>
	<p>Road and Sidewalk Access: In order to complete the work in a safe manner, there will be road and sidewalk restrictions within the construction work zone. Access for emergency vehicles will be maintained at all times.</p> <p>Driveway Access: The contractor will notify you of any temporary restrictions to your driveway access. If your property has two entrances, one entrance will be kept open at all times.</p>
	<p>Traffic Management: Efforts have been made to manage traffic in the area for the safety of workers, road users and residents. Road users should expect some delays.</p>



Restoration: The construction work area will be restored with sod and/or asphalt where required. Interlocking bricks, flagstone on a granular base, or other similar features that are removed from public and private property during construction will be replaced.

All restoration work is scheduled for 2017

MORE INFORMATION:

If you have questions about the upcoming work, please contact us and quote **Contract 16ECS-103LR**

Field Ambassador	Taras Pawluk, 416-806-1763, taras.pawluk@wspgroup.com
TTY Hearing Impaired Service	416-338-0889 (7 Days a week, 8:00 am – 5:00 pm, closed holidays)
General inquiries	311
Website	toronto.ca/improvements/ward3.htm

Thank you for your patience. Building a great city takes time. Better infrastructure for all of us is worth the wait.