

March 14, 2016

Watermain Abandonment on Dufferin St., Lappin Ave., Hallam St., Shaw St., Yarmouth Rd., Manning St., Vermont Ave. & Bathurst St.

Contract No.: 15ECS-LU-03TT
 Expected Start Date: Summer 2016
 Expected End Date: Fall 2017


**Timeline is subject to change. Future notice to be provided.*

The City of Toronto is planning to abandon Cast Iron watermains on Dufferin St, (from Dupont St. to Lappin Ave.), on Lappin Ave.,(west of Dufferin St. along Hallam St., Shaw St., Yarmouth St., Manning Ave., Vermont Ave., and Bathurst St, ending north of Dupont St. The contractor will also abandon a watermain on Clinton St. north of Yarmouth Rd (see map).

Abandoning watermains involves filling the old mains with cellular grout and demolishing chambers at various locations within the watermain routes and backfilling these areas with unshrinkable fill.

This project is part of the Council-approved 2016 Capital Works Program to renew our aging water infrastructure, improve water distribution and reduce the risk watermain breaks.

MAP OF WORK AREA

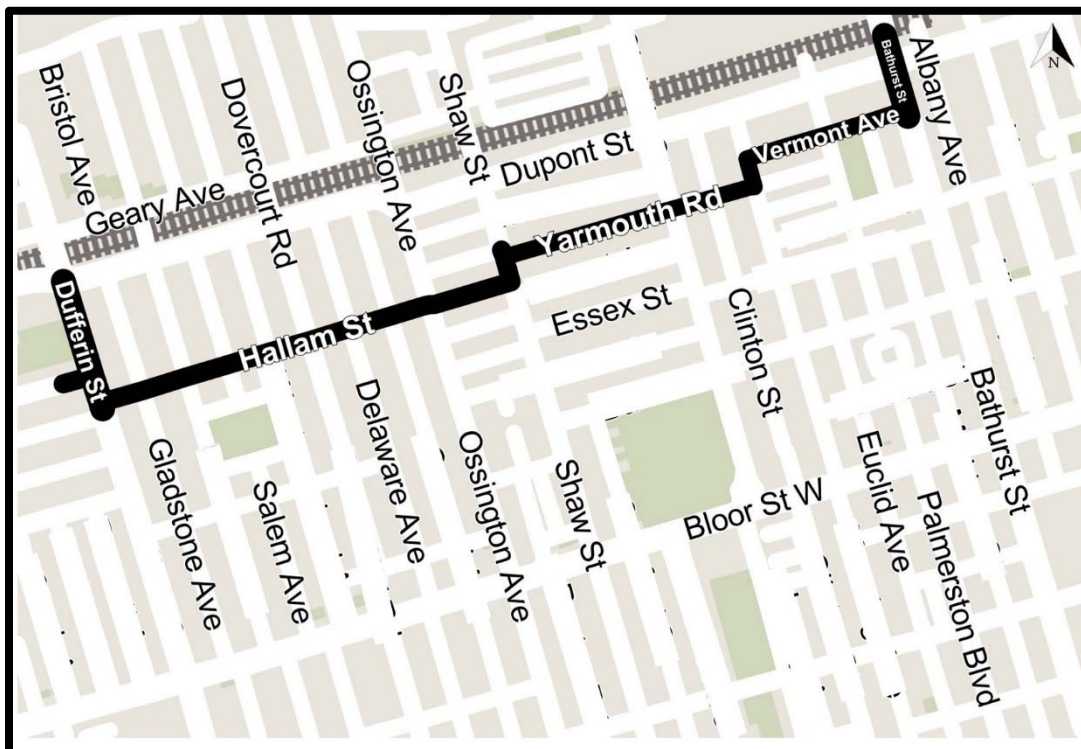

WORK DETAILS

The City’s contractor will move construction equipment on-site and prepare the work areas before construction begins. Construction crews will then:

- Excavate the road at two cutting and capping locations, Dupont St. and Dufferin St., Clinton St., north of Yarmouth Rd., and at 12 chamber locations being demolished.
- Backfill the demolished chambers with unshrinkable fill
- Inject cellular grout into the watermains being abandoned
- Restore all work areas affected by construction

WHAT TO EXPECT BEFORE CONSTRUCTION

- Work crews will mark the locations of underground utilities, such as gas, water and cable so that the construction work does not interfere with these utilities.
- Affected properties will receive a Construction Notice approximately two weeks before work begins with more information about the work including any road closure and water service disruptions
- Work in the boulevard in front of homes and commercial properties is expected. This work includes removing and replacing driveways, municipal sidewalks and grassed boulevards, where necessary.
- Property owners should remove items located within City property limits (boulevard), such as landscaping and or decorative objects before work starts. If you have a sprinkler system within the boulevard, please contact the Project Manager listed below.



Accessible Accommodation: Residents who require accommodation (level entry, longer notice, etc.) must contact the **Project Manager** to arrange for access during the construction period.

NEED MORE INFORMATION?

If you have questions about the upcoming work, please contact us.

Project Manager	Oscar A. Orellana, P. Eng. 416-392-8226 oorella@toronto.ca
TTY Hearing Impaired Service	416-338-0889 (7 Days a week, 8:00 am – 5:00 pm, closed holidays)
General inquiries	311
Website	toronto.ca/improvements/ward18.htm or toronto.ca/improvements/ward19.htm or toronto.ca/improvements/ward20.htm