Pre-Construction Notice

April 15, 2015

Watermain Replacement
Wilket Road and Wyegate Court

Expected Start Date: July 2015
Expected Completion Date: November 2015

The City of Toronto will be replacing the watermain on Wilket Road and Wyegate Court and Medalist Road. This work will also involve replacing the City-owned portion of substandard water services. This project is part of the 2015 Capital Works Program.

Work will take place on **Wilket Road** from Bayview Avenue to Wyegate Court and on **Wyegate Court** from Wilket Road to Wilket Road.

Further notice will be given prior to construction starts with a more accurate start date. Your co-operation and patience during the construction period is crucial and appreciated.

Map of Work Area

Project Details
This project involves:

- Replacing the existing watermain with new pipes
- Replacing the City-owned portion of substandard water services
- Reinstating of the boulevards, and driveways impacted by construction

Temporary lane closures and parking restrictions near the construction zone are required, but local access and emergency traffic will be maintained at all times.

Many property owners have planted landscaping, fences, irrigation systems or other physical features in front of their home which are within the City property limits. These may be in the way of the construction. In such cases, residents are advised to remove these items prior to the beginning of construction in order to avoid unnecessary damage. The City will not be responsible for damage to any privately owned items installed on the City's property.

Disruptions during Construction
In order to complete the watermain replacement and water service replacement in a safe manner, it will be necessary to reduce traffic lanes. Access to driveways will be interrupted from time to time during construction. The contractor is obligated to notify residents and businesses of any temporary driveway closures.

Pre-Construction Notice

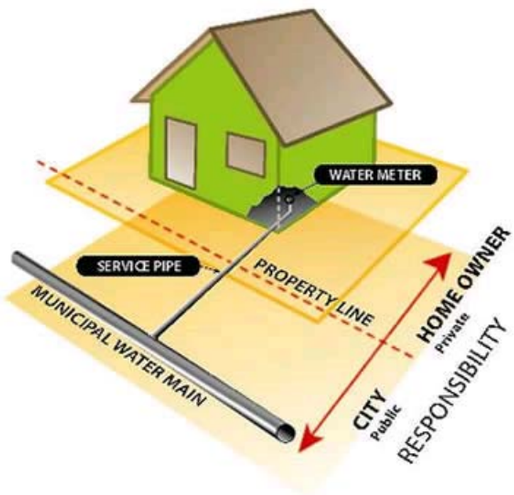

Substandard Water Service Replacement

A water service is the pipe that connects your house to the City's water distribution system to deliver water into your home. There are two portions to the water service – the privately-owned portion and the publicly-owned portion.

The privately-owned portion runs from the property line to the home and is owned by the property owner; the City-owned portion runs from the property line to the watermain and is owned by the City.

The City will replace the City-owned portion of any substandard water service connection discovered during construction. The City is not responsible for replacing the privately-owned portion of the water service.

Your water service may be considered substandard if:

- the water service is made of lead or galvanized metal;
- the water service is smaller than the City's 19 mm standard size;
- it is a double service, delivering water to more than one residential property; or
- It is leaking or broken.

Please take the time to read the attached fact sheet carefully as it contains important information on replacement of lead pipes and potential health concerns.

Next Steps

1. A public tender call will be issued in late April.

2. Subject to availability and funding, a contract will be awarded to the firm with the lowest bid price meeting the City's specifications.

3. A construction notice with more details of the project will be distributed to all residents/business within the project limits prior to the start of construction.

For more information

Project website	toronto.ca/constructioninfo	
	toronto.ca/leadpipes	
Contact:	John Croxall	Field Ambassador 416-473-5799
24 Hours:	General Inquiries TTY	311 416-338-0889
Councillor	Jaye Robinson councillor_robinson@toronto.ca	
Ward 25	Don Valley West	416-395-6408